

- Suitable for fine and ultra-fine applications

All models hold P7 bayonet locked filter elements – O.R. 226

- Easy maintenance – quick release system to hold the bell
- Easy to clean - low roughness of the inner surface and unique design of the removable internal parts


Minimum internal volume to reduce loss of product

- Sanitary design allows full access to all parts


- Accurate surface treatment

-

OPTIONAL FITTINGS
FOR SV SERIES




- Pressure gauge/vent assembly
- Drains & sampling ports on application

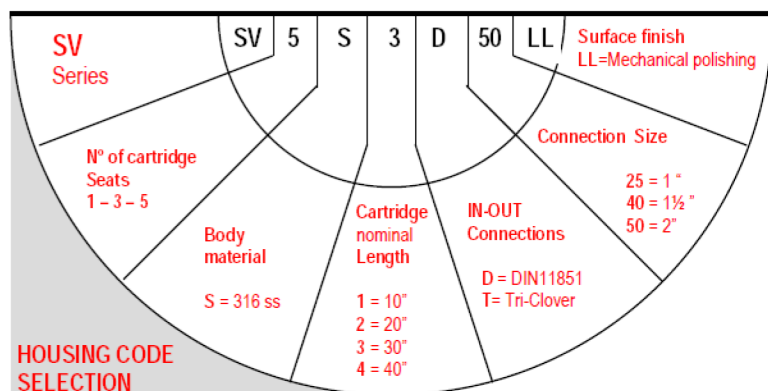

AKRO SRL - BRASOV


Single cartridge SV 1

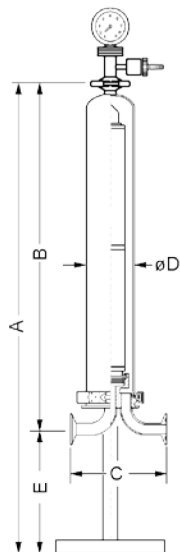

Type		N° of cartridges	Cartridge configuration	Dimensions mm					In-out connection size
				A	B	C	ø D	E	
SERIES 1	SV1S1 #25 LL	1 x 250 mm (10")	P7	685	470	204	101,6	215	# = T = ø1"
	SV1S2 #25 LL	1 x 500 mm (20")	P7	935	720	204	101,6	215	Tri-Clov er
	SV1S3 #25 LL	1 x 750 mm (30")	P7	1185	970	204	101,6	215	# = D = DN25
	SV1S4 #25 LL	1 x 1000 mm (40")	P7	1435	1220	204	101,6	215	DIN11851

- Max operating pressure for all SV filter housings: 10 bar – Flow rates as per filter cartridge curves
- All dimensions correct at time of going to press. Filterflo reserves the right to modify dimensions without prior notice

Multi cartridge SV 3 and SV 5

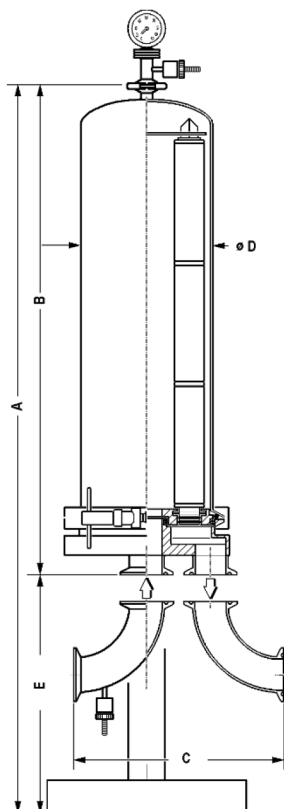

Type		N° of cartridges	Cartridge configuration	Dimensions mm					In-out connection size
				A	B	C	ø D	E	
SERIES 3	SV3S1 #40 LL	3 x 250 mm (10")	P7	959	495,6	284	168,3	463,4	# = T = ø1½"
	SV3S2 #40 LL	3 x 500 mm (20")	P7	1209	745,6	284	168,3	463,4	Tri-Clov er
	SV3S3 #40 LL	3 x 750 mm (30")	P7	1459	995,6	284	168,3	463,4	# = D = DN40
	SV3S4 #40 LL	3 x 1000 mm (40")	P7	1709	1245,6	284	168,3	463,4	DIN11851
SERIES 5	SV5S1 #50 LL	5 x 250 mm (20")	P7	984,5	514,1	349	219,1	470,4	# = T = ø2"
	SV5S2 #50 LL	5 x 500 mm (20")	P7	1234,5	764,1	349	219,1	470,4	Tri-Clov er
	SV5S3 #50 LL	5 x 750 mm (30")	P7	1484,5	1014,1	349	219,1	470,4	# = D = DN50
	SV5S4 #50 LL	5 x 1000 mm (40")	P7	1734,5	1264,1	349	219,1	470,4	DIN11851

- Max operating pressure for all SV filter housings: 10 bar – Flow rates as per filter cartridge curves
- All dimensions correct at time of going to press. Filterflo reserves the right to modify dimensions without prior notice

AKRO SRL - BRASOV